

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
16 October 2003 (16.10.2003)


PCT

(10) International Publication Number  
**WO 03/085902 A1**

- (51) International Patent Classification<sup>7</sup>: **H04L 12/56**
- (21) International Application Number: **PCT/EP02/03990**
- (22) International Filing Date: **10 April 2002 (10.04.2002)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON (publ)** [SE/SE]; S-126 25 Stockholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **ERIKSSON, Ann-Christine** [SE/SE]; Mjölnerbacken 46, S-174 48 Sundbyberg (SE). **COLLINS, Sandra** [IE/IE]; 24 Highthorn Park, Mounttown, Dun Laoire, Co. Dublin (IE). **BACKLUND, Ingemar** [SE/SE]; Terrassvägen 5, S-191 44 Sollentuna (SE).
- (74) Agent: **O'CONNELL, David, Christopher**; Haseltine Lake & Co, Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published: — with international search report

[Continued on next page]

(54) Title: DATA PRESERVATION

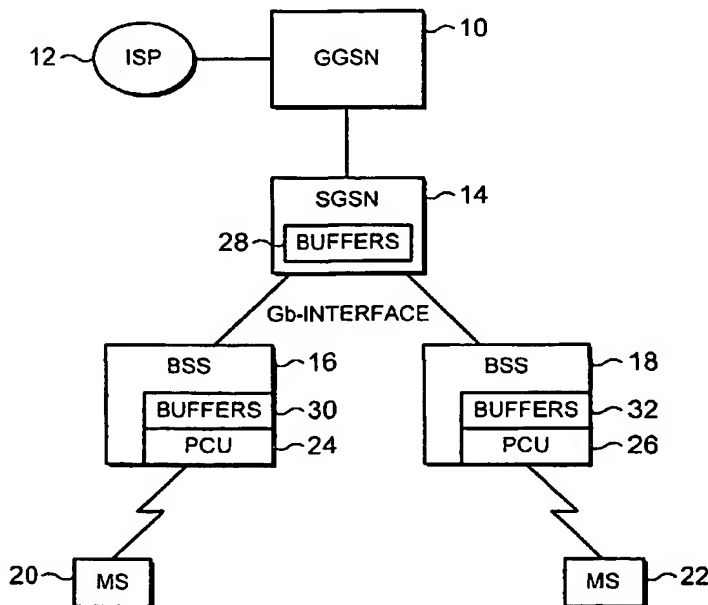

(57) Abstract: A method ensures that data is not lost during an inter-Routing Area or inter-Network Service Entity cell change in a GPRS network. When a mobile station passes from one cell into another, a command is sent from the SGSN to the BSS serving the first cell, causing that BSS to discard any data awaiting transmission to the mobile station. A reply is sent from the BSS to the SGSN, and, in response thereto, the SGSN transmits data to the BSS serving the new cell, in order to ensure that all of the data intended for the mobile station is transmitted thereto.

WO 03/085902 A1

WO 03/085902 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**DATA PRESERVATION****TECHNICAL FIELD OF THE INVENTION**

5 The invention relates to a mobile communications network, and in particular to a method for ensuring that data is not lost when a mobile device moves between different cells in a cellular system.

10 **BACKGROUND OF THE INVENTION**

In a known General Packet Radio Service (GPRS) mobile communications network, a Gateway GPRS Support Node (GGSN) acts as a gateway to and from an Internet  
15 Service Provider (ISP), and has a connection to a general data communications network. Connected to the GGSN is a Serving GPRS Support Node (SGSN), which is further connected to multiple Base Station Systems (BSS).

20

A mobile station (MS), which is active within the network, has a connection to one BSS, and the SGSN handles the routing of data from the GGSN to the BSS.

25 Each BSS has at least one Packet Control Unit (PCU), which handles the different GPRS users, and schedules data on the radio resources which are available for GPRS users in the cell.

30 When downlink data is transmitted to an MS in a GPRS network, the data is buffered, in the form of Logical Link Control (LLC) Packet Data Units (PDU) both in the SGSN and in the BSS. The LLC is the protocol which provides a logical link between the MS and the SGSN.

35

There are two modes of LLC operation, as defined in the  
3rd Generation Partnership Project Technical  
Specification 3GPP TS 44.064 V5.0.0 Sections 4.3 and  
4.4, namely unacknowledged operation and acknowledged  
5 operation.

In acknowledged operation, PDUs are transmitted in  
numbered Information (I) frames. The SGSN retains a  
copy of each transmitted LLC-PDU, until this is  
10 acknowledged by the MS.

In unacknowledged operation, LLC-PDUs are transmitted  
in numbered Unconfirmed Information (UI) frames. These  
UI frames are not acknowledged at the LLC layer, and  
15 the SGSN does not need to save LLC-PDUs that are  
transmitted to the MS.

As further defined in the 3rd Generation Partnership  
Project Technical Specification 3GPP TS 08.18 V8.9.0,  
20 section 8.1, when an SGSN detects a cell change of an  
MS, the SGSN sends a FLUSH-LL PDU to the BSS  
controlling the old cell. At that time, the BSS may  
contain stored PDUs, which are awaiting transmission to  
the MS. In some cases, for example if the new cell is  
25 associated with the same BSS, and if the new cell is in  
the same routing area as the old cell, it will be  
possible for those PDUs to be transferred to a queue in  
the BSS associated with the new cell.

30 However, if that is not possible, the PDUs are deleted.  
In that case, this data cannot be transmitted to the  
mobile station using the LLC protocol. Instead, it  
must be retransmitted using a higher layer protocol,  
which can lead to a substantial reduction in the rate  
35 at which data can be transmitted to the mobile station.

**SUMMARY OF THE INVENTION**

According to a first aspect of the present invention, there is provided a method which ensures that data is not lost during a cell change. As applied to a GPRS network, the invention ensures that data is not lost during an inter-Routing Area or inter-Network Service Entity cell change, or during another cell change in which data are deleted at a radio access node.

More specifically, when a mobile station passes from one cell into another, a command is sent from a core network node to the radio access node serving the first cell. A reply is sent from the radio access node to the core network node, and, in response thereto, the core network node transmits data to the radio access node serving the new cell, in order to ensure that all of the data intended for the mobile station is transmitted thereto.

In particular, the command which is sent from the core network node to the radio access node serving the first cell causes that radio access node to discard any data awaiting transmission to the first cell, and the core network node then transmits the discarded data to the radio access node serving the new cell.

In preferred embodiments of the invention, the network is a GPRS network, the radio access node is a Base Station System (BSS), typically including multiple Radio Base Stations (RBSs), and the core network node is a SGSN. Further, in that case, the command sent from the SGSN to the BSS is a FLUSH command.

In the case of a GPRS network, cell changes in which data are deleted at a radio access node are usually

inter-Routing Area or inter-Network Service Entity cell changes. A Routing Area may be defined to be equivalent to a Base Station System (BSS) or a Radio Access Network (RAN), and a Network Service Entity may  
5 be defined to be equivalent to a BSS, but this is not required.

Thus, the cell change may be from a first cell to a second cell, where the first and second cells are, for  
10 example (a) served by different Radio Base Stations in different Network Service Entities and in different Base Station Systems, (b) served by different Radio Base Stations in different Network Service Entities within the same Base Station System, (c) served by  
15 different Radio Base Stations in the same Network Service Entity within the same Base Station System.

In a preferred embodiment, all data transmitted from the core network node to a radio access node is stored  
20 in the core network node for a predetermined time. In response to the command from the core network node, the radio access node serving the first cell sends a reply which identifies the discarded data, and the core network node sends copies of the discarded data to the  
25 new radio access node serving the new cell.

In an alternative preferred embodiment of the invention, the radio access node receives the command causing it to discard the untransmitted data and, in  
30 response thereto, it sends the untransmitted data to the core network node, for forwarding to the radio access node serving the new cell.

The network preferably has two modes of operation in  
35 which data can be sent from the core network node to the radio access node, namely an acknowledged mode in

which data are stored in the core network node until  
acknowledged by the mobile station, and an  
unacknowledged mode in which data are not acknowledged  
by the mobile station. In that case, the methods  
5 according to the invention are particularly applicable  
to data sent in unacknowledged mode.

In the case of a GPRS network, the acknowledged mode  
and the unacknowledged mode are LLC-acknowledged mode  
10 and LLC-unacknowledged mode.

### **BRIEF DESCRIPTION OF DRAWINGS**

Figure 1 is a schematic representation of a mobile  
15 communications network in accordance with the present  
invention.

Figure 2 illustrates the data transmission protocols in  
use in a part of the network shown in Figure 1.

20

Figure 3 illustrates a first method in accordance with  
the present invention.

Figure 4 illustrates a second method in accordance with  
25 the invention.

Figure 5 shows a part of a second mobile communications  
network in accordance with the present invention.

### **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

Figure 1 is a schematic representation of a part of a  
General Packet Radio Service (GPRS) mobile  
communications network, for example operating in  
35 accordance with the standards set by the 3rd Generation  
Partnership Project.

The network includes at least one Gateway GPRS Support Node (GGSN) 10, which is the gateway to a general data communications network (not shown), for example through  
5 an Internet Service Provider (ISP) 12. Each GGSN 10 is connected to one or more Serving GPRS Support Nodes (SGSN) 14, of which only one is shown in Figure 1.

Each SGSN is connected to a plurality of Base Station  
10 Systems (BSSs) 16, 18. It will be apparent to the person skilled in the art that a real network will include more SGSNs and BSSs than the small number illustrated in Figure 1. However, description of those additional nodes is not required for an understanding  
15 of the present invention.

As is known, each BSS 16, 18 is in radio communication with any Mobile Stations (MS) which are active within their respective cells. For example, Figure 1 shows a  
20 first MS 20, having a connection over the air interface to the BSS 16, and also shows a second MS 22, having a connection over the air interface to the BSS 18. Again, it will be apparent that the network can provide service to many more such Mobile Stations.

25 Each BSS 16, 18 includes a respective Packet Control Unit (PCU) 24, 26 which handles the GPRS users and schedules data on the radio resources available for a GPRS user in a cell.

30 When transmitting data to an MS 20, 22 in a GPRS network, the data is buffered in a buffer 28 in the SGSN, and in a buffer 30, 32 in the respective BSS.

35 A Routing Area (RA) is a collection of cells, which may be equivalent to the cells served by one Base Station



System, or may be a subset of the cells served by a Base Station System, or may be a collection of cells served by more than one Base Station System. A Network Service Entity (NSE) is a logical entity located in the Base Station System or in the SGSN. One Network Service Entity in the Base Station System communicates with one Network Service Entity in the SGSN (in a one-to-one relationship). One or more Network Service Entities may be defined per Base Station System.

Similarly one or more Network Service Entities may be defined per SGSN. A Network Service Entity cannot comprise more than one Base Station System, or more than one SGSN.

In the embodiment described with reference to Figure 1, it is assumed that one Base Station System (BSS) is equivalent to one routing area and also to one Network Service Entity (NSE), and that one BSS also contains one PCU. It is of course possible to have multiple PCUs, NSEs and routing areas in any BSS.

Figure 2 illustrates the protocol stacks which are in use between the Mobile Station MS and Base Station System BSS on the air interface (or Um interface), and between the BSS and the SGSN on the Gb interface. The protocol stack on the air interface is conventional, and is for example illustrated and described in 3GPP TS 44.064 V5.0.0 section 4.1. It will therefore not be described further herein, but is provided only to illustrate the protocols used in the present invention, in particular the Logical Link Control (LLC), which provides a logical link between the MS and SGSN, and the BSS GPRS Protocol (BSSGP), which is used between the BSS and SGSN.

35

The type of data that is buffered in the SGSN and in the BSS is in the form of Logical Link Control (LLC) Packet Data Units (PDUs).

- 5 There are two LLC modes, namely acknowledged and unacknowledged mode. In unacknowledged LLC mode, PDUs are transmitted in numbered Unconfirmed Information (UI) frames, and the SGSN will not save LLC-PDUs that are transmitted to the MS. In acknowledged LLC mode,  
10 LLC-PDUs are transmitted in numbered Information (I) frames, and the SGSN retains a copy of the transmitted LLC-PDU until positively acknowledged by the MS.

The LLC-PDUs that are sent from the SGSN to the BSS are  
15 associated with a BSSGP Virtual Connection Identity (BVCI) and identified by a Temporary Logical Link Identity (TLLI). They may also be associated with a Packet Flow Identity (PFI) if the Packet Flow Management (PFM) procedure is in use between the SGSN  
20 and the BSS.

When the PFM procedure between the SGSN and the BSS is used there may be several packet data flows to the BSS for a Mobile Station, each of a certain Quality of  
25 Service. The PFM procedure is used to differentiate between LLC-PDU data flows having different Quality of Service requirements. A Packet Flow Context (PFC) and its Packet Flow Identity (PFI) identify each packet data flow. A BVCI, TLLI, PFI and a LLC-PDU are  
30 included in the BSSGP PDUs sent from the SGSN to the BSS when the PFM procedure is used.

The time LLC-PDUs should be stored in the BSS is specified by the PDU Lifetime. If the BSS cannot  
35 transmit the LLC-PDU to the MS before the PDU Lifetime expires, then the LLC-PDU is discarded in the BSS. The

BSS then informs the SGSN about the amount of discarded data.

5 The data flow between the SGSN and the BSS is regulated by a flow control mechanism on the Gb-interface. The data flow may be controlled per BVC (BSSGP Virtual Connection, i.e. per cell) and/or per mobile station. The BSS informs the SGSN about the bucket size per BVC and/or per MS in the BSS, and the allowed bit rate on  
10 the Gb-interface per BVC and/or per MS to the BSS. In case a bucket in the BSS is overflowed the BSS may discard new LLC-PDUs from the SGSN. The BSS informs the SGSN about the amount of discarded data. Overflow of buckets in the BSS may happen at for example sudden  
15 changes of radio conditions for an MS or at cell change.

Figure 3 illustrates the sequence of messages sent in a method according to the present invention.

20

When an SGSN detects a cell change of an MS, the SGSN sends a FLUSH-LL PDU, message 30, to the current BSS (BSS1 in Figure 3). This message corresponds to the message described in 3GPP TS 08.18 V8.9.0 section 8.1.

25

This invention is primarily concerned with the situation in which there are one or more LLC-PDUs stored in the BVCI related to a specific cell of BSS1, awaiting transmission to the mobile station, which  
30 would otherwise have to be deleted because they cannot be transferred to a "new" BVCI corresponding to the new cell. Moreover, the invention is primarily concerned with the situation where these LLC-PDUs, which are to be deleted, have been transmitted in LLC-unacknowledged  
35 mode. It will be appreciated that, if there are any such LLC-PDUs which have been transmitted in

acknowledged mode, they will be stored within the SGSN, until there is an acknowledgement that they have been successfully transmitted to the mobile station.

- 5 In the event that there are unacknowledged mode LLC-PDUs, which are to be deleted from the BVCI related to a specific cell in BSS1, BSS1 sends a return message to the SGSN, message 32 in Figure 3, and this message includes a tag to identify that it is a response to the  
10 received FLUSH message 30. Further, this return message 32 also contains copies of any LLC-PDUs (UI frames), which are to be deleted from the BVCI related to a specific cell in BSS1.
- 15 In response to this message from BSS1, the SGSN sends a new message, message 34 in Figure 3, to the new Base Station System BSS2 controlling the new cell. This new message can contain the copies of the LLC-PDUs which were contained in message 32 from the old Base Station  
20 System BSS1, or the SGSN can simply retransmit the relevant LLC-PDUs directly to the new Base Station System.

The transmission of data over the air interface from  
25 the new Base Station System BSS 2 to the mobile station can then begin immediately.

This therefore ensures that, when a mobile station changes cell from one cell to another, there is no loss  
30 of data in the LLC layer, which would otherwise require re-transmission at a higher layer protocol.

Figure 4 shows an alternative procedure in accordance with another embodiment of the present invention.

35

Again, the illustrated procedure begins with the SGSN sending a FLUSH-LL PDU, message 30, to the old Base Station System BSS1, when it is determined that a cell change has occurred.

5

However, a difference between this process, and the process illustrated in Figure 3, is that, in this case, all LLC-PDUs that are transmitted from the SGSN to the PCU in the BSS are kept in the SGSN, even in

10

unacknowledged mode, until it can be assumed that they have been transmitted to the mobile station, or need to be deleted for some other reason. For example, the SGSN can retain a copy of all LLC-PDUs for a finite period of time, such as the Packet Data Unit Lifetime (PDU Lifetime). Thus, even LLC-PDUs which are sent in

15

unacknowledged mode are retained in the SGSN although, in the normal course of events, these stored PDUs are deleted after the preset time has expired.

20

However, if the MS changes cells, it is these retained PDUs which are used.

Thus, in response to the FLUSH-LL message 30, the old Base Station System BSS1 sends a reply message 42 which

25

identifies the LLC-PDUs which have been deleted. More specifically, the message 42 includes a tag which identifies that it is a response to a received FLUSH message, and further indicates the mobile station to which the FLUSH message related, as well as the number

30

of LLC-PDUs (UI frames) which have been deleted.

For example, if the Packet Flow Management (PFM) procedure is in use between the SGSN and the Base Station System BSS 1, the message 42 includes the

35

Packet Flow Indicator (PFI) and the number of discarded LLC-PDUs for that PFI, in addition to the BVCI and the

TLLI. The SGSN may then determine which LLC-PDUs have been discarded in the BSS by counting backwards from the most recently sent LLC-PDU, until the number of discarded PDUs has been reached. This is done per PFI,  
5 TLLI and BVCI.

Alternatively, if the PFM procedure is not in use, the message 42 simply indicates the number of discarded LLC-PDUs per BVCI and TLLI. In that case, the SGSN can  
10 determine which PDUs were discarded in the BSS by counting backwards from the most recently sent LLC-PDU per TLLI and BVCI.

As an alternative, the message 42 can contain an  
15 indication of the indices of the LLC-PDUs that have been deleted in the Packet Control Unit of BSS1.

On receipt of the message 42 from BSS1, the SGSN sends a message 44 to the new Base Station System BSS2,  
20 containing the PDUs which had been discarded in BSS1, or the SGSN can simply retransmit the relevant LLC-PDUs directly to the new Base Station System.

The PCU in BSS 2 can then immediately begin downlink  
25 transfer of data to the mobile station, again without requiring retransmission of the data on a higher layer protocol.

The invention is described above with reference to a  
30 network architecture in which each BSS corresponds to one Routing Area (RA) and one Network Service Entity (NSE). Thus, when there is a cell change between Routing Areas or between Network Service Entities, the new cell is served by a different BSS from the first.

35

In the architecture shown in Figure 5, the BSS contains two NSEs, NSE1 and NSE2, which are connected to respective SGSNs, SGSN1 and SGSN2.

- 5 In use, the SGSN sends data to the BSS and the NSE is used to route it to the correct cell.

In this case, the MS may change cell to a cell served by a different NSE within the same BSS. If the cell  
10 change is from a first cell to a second cell, and the first cell is in a first NSE (NSE1) served by a first SGSN (SGSN1), the second cell may be in a second NSE (NSE2) served by a second SGSN (SGSN2). As described in 3GPP TS 08.18 V8.9.0 section 8.1, the data buffered  
15 in the first NSE (NSE1) cannot be transferred to the second NSE (NSE2).

Therefore, when the FLUSH message is received in the BSS, the stored data is deleted. In accordance with  
20 the invention, the BSS sends a notification to the first SGSN (SGSN1) that it has been deleted. As discussed above with reference to Figures 3 and 4, this notification may allow the deleted data to be identified, or may contain copies of the deleted data.  
25 The first SGSN (SGSN1) then sends the deleted data to the second SGSN (SGSN2), which sends the data back to the second NSE (NSE2) in the same BSS serving the new cell.

30 The standard, at 3GPP TS 08.18 V8.9.0 section 8.1, also mentions the possibility that LLC-PDU(s) for a given MS stored at the old cell may be deleted, even in the event of a cell change within one Network Service Entity and within one routing area. Again, in  
35 accordance with the invention, the BSS can delete the stored data and notify the SGSN that it has been

deleted. The SGSN can then send the deleted data to the new cell.

5 There are therefore disclosed methods which allow any data, which have been discarded in an old radio access node, to be transmitted from the SGSN to a new radio access node, when a mobile station changes cells.



**CLAIMS**

1. A method of controlling a cell change in a mobile communications network, in which data is transmitted  
5 from a core network node to a mobile station in packets, and in which data packets are stored in a respective radio access node before transmission to the mobile station, the method comprising:

10 detecting a cell change of a mobile station, from a first cell served by a first cell radio access node to a second cell served by a second cell radio access node;

sending a first message from the core network node to the first cell radio access node;

15 in response to said first message, discarding any data packets stored in the first cell radio access node for transmission to the mobile station, and sending a reply message to the core network node; and

20 in response to said reply message, transmitting said data packets, discarded in the first cell radio access node, from the core network node to the second cell radio access node.

2. A method as claimed in claim 1, wherein the  
25 network is a GPRS network, and the core network node is an SGSN.

3. A method as claimed in claim 2, wherein the first message is a FLUSH-LL command.

30

4. A method as claimed in claim 2, wherein the data packets comprise data packets transmitted in LLC unacknowledged mode.

5. A method as claimed in claim 2, wherein the second cell is in a different Routing Area or different Network Service Entity from the first cell.

5 6. A method as claimed in claim 1, wherein data may be transmitted from the core network node to a radio access node in acknowledged mode or in unacknowledged mode, wherein data transmitted in unacknowledged mode are retained in the core network node for a  
10 predetermined time period, and wherein said reply message allows the data packets discarded in the first cell radio access node to be identified in the core network node.

15 7. A method as claimed in claim 6, wherein said reply message indicates the number of data packets discarded in the first cell radio access node.

8. A method as claimed in claim 6, wherein said reply  
20 message specifically identifies the data packets discarded in the first cell radio access node.

9. A method as claimed in claim 6, wherein the network is a GPRS network, and the core network node is  
25 an SGSN.

10. A method as claimed in claim 6, wherein the network is a GPRS network, and the acknowledged mode and unacknowledged mode are LLC-acknowledged mode and  
30 LLC-unacknowledged mode respectively.

11. A method as claimed in claim 9, wherein the first message is a FLUSH-LL command.

12. A method as claimed in claim 1, wherein said reply message includes copies of the data packets discarded in the first cell radio access node.

5 13. A method as claimed in claim 12, wherein the network is a GPRS network, and the core network node is an SGSN.

10 14. A method as claimed in claim 13, wherein the first message is a FLUSH-LL command.

15 15. A method as claimed in claim 1, wherein the network is a GPRS network, the first cell radio access node is a first BSS, and the second cell radio access node is a second BSS.

20 16. A method as claimed in claim 1, wherein the network is a GPRS network, the first cell radio access node is a first BSS, and the second cell radio access node is the first BSS.

17. A method as claimed in claim 1, wherein:  
the network is a GPRS network;  
the core network node comprises a first SGSN;  
25 the first cell is in a first NSE served by the first SGSN; and  
the second cell is in a second NSE served by a second SGSN; and  
wherein the step of transmitting said data packets  
30 from the core network node to the second cell radio access node comprises transmitting said data packets from the first SGSN to the second SGSN and then to the second cell radio access node.

35 18. A radio access node, for use in a mobile communications network, the radio access node

comprising means for storing data packets before transmission to a mobile station, the radio access node further comprising:

means for acting on a first message from a core  
5 network node indicating a cell change of a mobile station, by:

discarding any data packets stored for  
transmission to the mobile station, and sending a reply  
message to the core network node, wherein said core  
10 network node is enabled to transmit said data packets,  
discarded in said radio access node, to the a second  
radio access node in response to said reply message.

19. A radio access node as claimed in claim 18,  
15 wherein said reply message indicates the number of data packets discarded in said radio access node.

20. A radio access node as claimed in claim 18,  
wherein said reply message specifically identifies the  
20 data packets discarded in said radio access node.

21. A radio access node as claimed in claim 18,  
wherein said reply message includes copies of the data  
packets discarded in the radio access node.

25 22. A radio access node as claimed in claim 18,  
wherein the network is a GPRS network, and the radio access node comprises a BSS.

30 23. A radio access node as claimed in claim 18,  
wherein the network is a GPRS network, and the core network node is an SGSN.

24. A radio access node as claimed in claim 23,  
35 wherein the first message is a FLUSH-LL command.

25. A core network node for use in a mobile communications network, in which data is transmitted from the core network node to a mobile station in packets, and in which data packets are stored in a  
5 respective radio access node before transmission to the mobile station, the core network node comprising:

means for detecting a cell change of a mobile station, from a first cell served by a first cell radio access node to a second cell served by a second cell  
10 radio access node;

means for sending a first message from the core network node to the first cell radio access node in response to a cell change detection, said first message causing the first cell radio access node to delete  
15 stored data packets intended for transmission to the mobile station;

means for receiving a reply to said first message and, in response to said reply, transmitting said data packets, discarded in the first cell radio access node,  
20 from the core network node to the second cell radio access node.

26. A core network node as claimed in claim 25, wherein said network is a GPRS network, and said core  
25 network node is an SGSN.

27. A core network node as claimed in claim 26, wherein, when the second cell is served by a second different SGSN, said node is adapted to transmit said  
30 discarded data packets to the second cell radio access node through the second SGSN.

28. A core network node as claimed in claim 25, wherein data may be transmitted from the core network  
35 node to a radio access node in acknowledged mode or in unacknowledged mode, wherein data transmitted in

unacknowledged mode are retained in the core network node for a predetermined time period, and wherein said reply message allows the data packets discarded in the first cell radio access node to be identified in the  
5 core network node.

29. A core network node as claimed in claim 28, wherein the network is a GPRS network, and the acknowledged mode and unacknowledged mode are LLC-  
10 acknowledged mode and LLC-unacknowledged mode respectively.

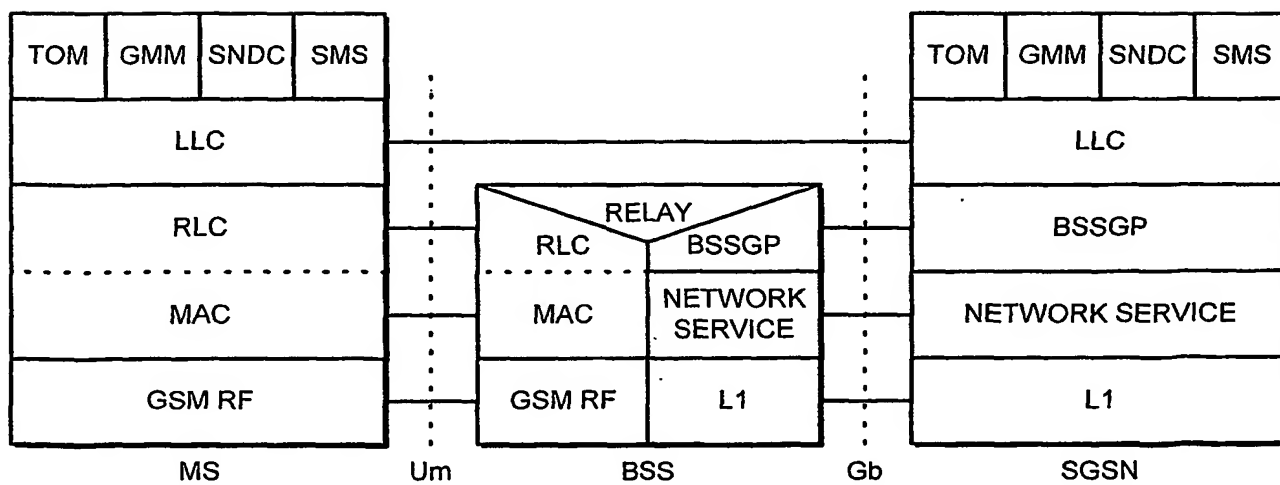
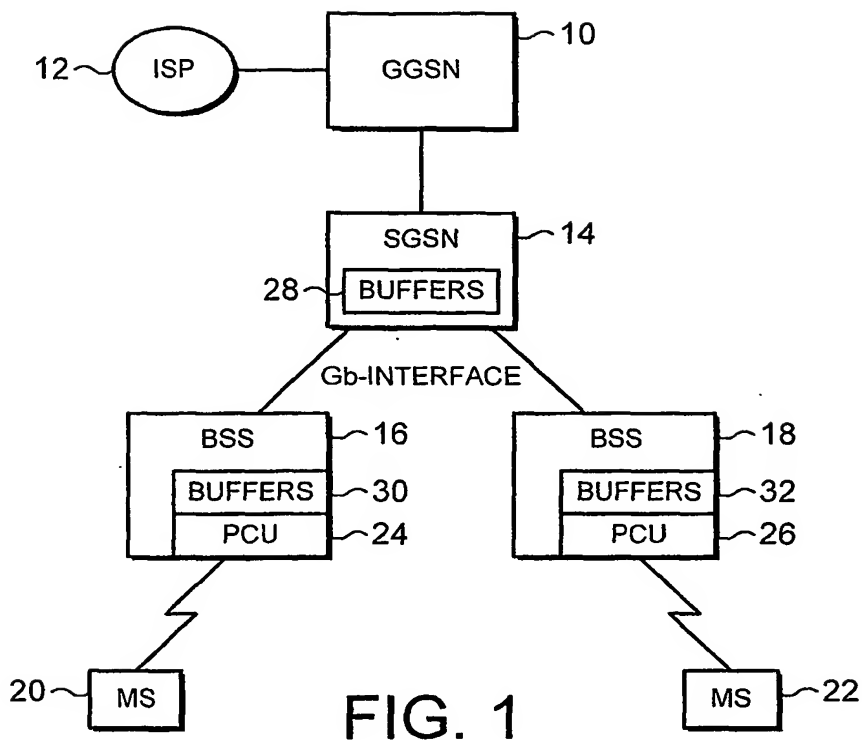


FIG. 2

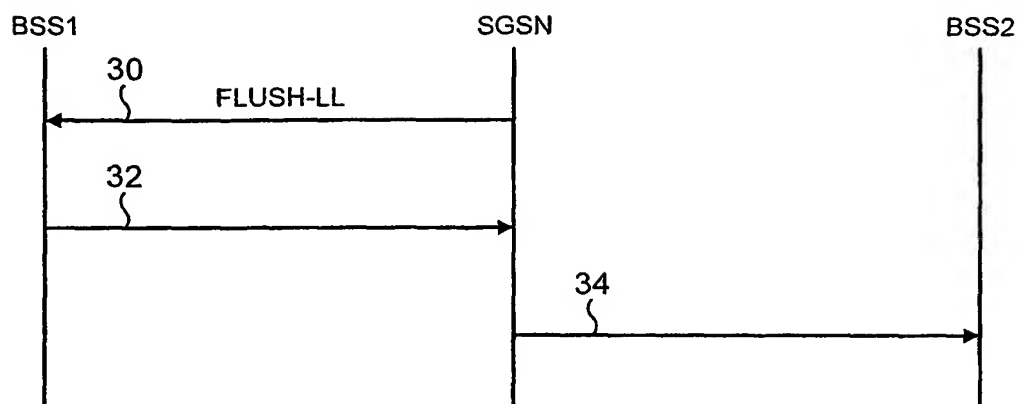


FIG. 3

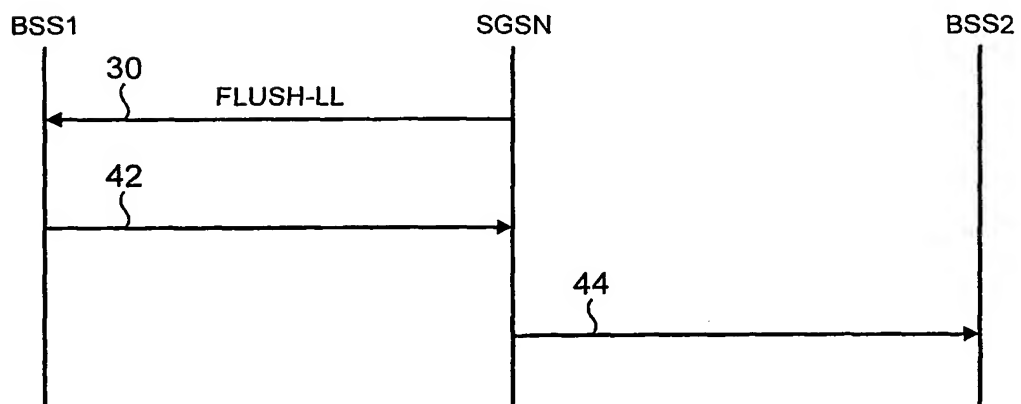


FIG. 4



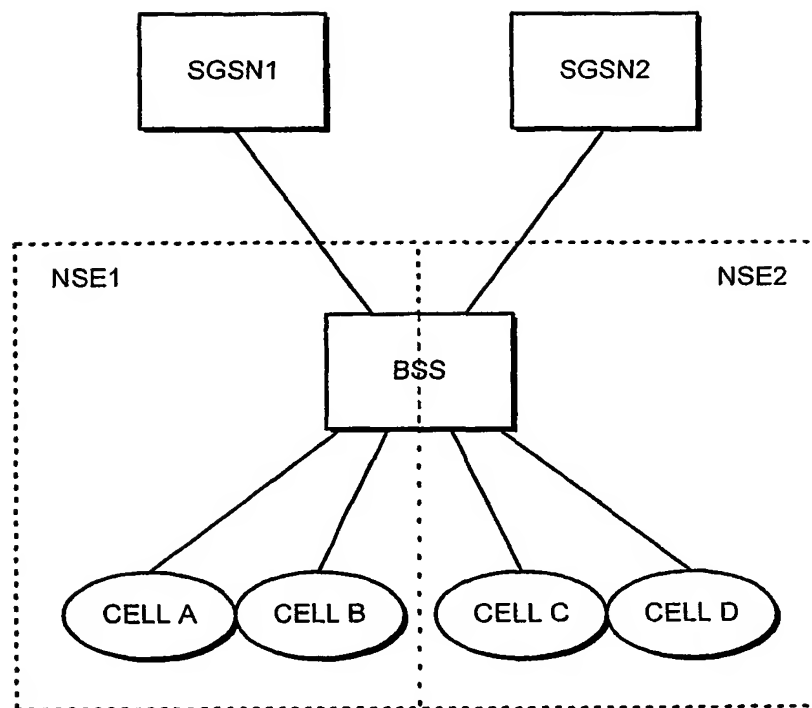


FIG. 5

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 02/03990

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01 74095 A (ERICSSON TELEFON AB L M) 4 October 2001 (2001-10-04) abstract page 4, line 1 - line 34 page 6, line 24 -page 7, line 16 page 11, line 8 - line 33	1-29
A	WO 98 47302 A (NOKIA TELECOMMUNICATIONS OY ;RAUHALA KRISTIAN (US)) 22 October 1998 (1998-10-22) abstract page 2, line 34 -page 3, line 29 page 4, line 13 -page 5, line 5 page 7, line 4 -page 8, line 28 -/--	1-29

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

13 January 2003

Date of mailing of the international search report

20/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Larcinese, C

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/03990

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99 34635 A (ERICSSON TELEFON AB L M) 8 July 1999 (1999-07-08) abstract page 3, line 11 - line 19 -----	1-29

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/03990

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0174095	A	04-10-2001	AU 3966001 A	08-10-2001
			EP 1269784 A2	02-01-2003
			WO 0174095 A2	04-10-2001
WO 9847302	A	22-10-1998	FI 971585 A	16-10-1998
			AU 6835698 A	11-11-1998
			CN 1252918 T	10-05-2000
			EP 0976269 A2	02-02-2000
			WO 9847302 A2	22-10-1998
			JP 2002501695 T	15-01-2002
			ZA 9803090 A	20-10-1998
WO 9934635	A	08-07-1999	NO 976150 A	01-07-1999
			AU 2193699 A	19-07-1999
			WO 9934635 A2	08-07-1999
			TW 437242 B	28-05-2001
			US 2001019544 A1	06-09-2001